

BATTERYcharge PRO 60A



Developed by professionals – Made for professionals

The OSRAM BATTERYcharge PRO 60A is a professional, intelligent battery charger suitable for a wide range of battery types for 12V and 24V vehicles. Ideal for use when different vehicles and even entire fleets need to be maintained, especially in professional workshops or showrooms. By selecting different battery types and charging levels, the user can set the specific charge required for the different battery types. The BATTERYcharge PRO 60A can deliver variable charging currents up to a maximum of 60A. This is possible for lead-acid batteries as well as lithium batteries (AGM, GEL, STD, EFB, LFP, LiFePO4) and start/stop batteries. Variable charging rates of up to 60A can also provide flexible slow or fast charging to meet the individual requirements of each user. In addition to the battery charging function, the BATTERYcharge PRO 60A has an integrated jump-start function. OSRAM's professional battery charger with integrated LCD screen runs through a 7-stage charge cycle for lithium batteries and a 3-stage charge cycle for all other batteries to restore and optimize battery performance and improve charge retention. Equipped with a handle for convenient portability on the top of the device and the wheels for easy pulling or pushing, the professional charger from OSRAM is easy to transport around the workshop.

Product datasheet

Technical data


Product information

Application (Category and Product specific)	Professional Battery Charger
---	------------------------------

Electrical Data

Charge Rate (Up to)	60 A
Maintenance Charge (up to)	60 A
Max battery capacity	700 Ah
Min battery capacity	14 Ah

Physical Attributes & Dimensions

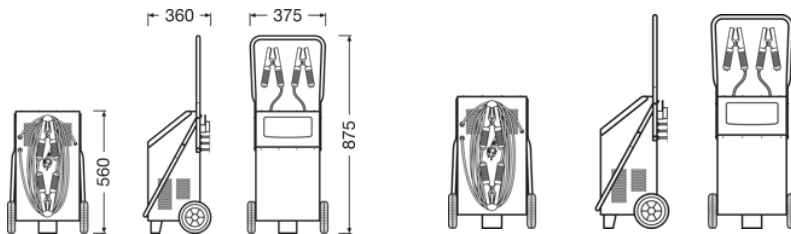

Length	360.0 mm
Width	375.0 mm
Height	875.0 mm

Additional product data

Recommended to Use With	Motorcycle, Car, Truck, Van, Boat
Stages: Lead, AGM, EFB	3
Stages: Lithium	7
Battery Connection	Crocodile Clamps

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Product datasheet


Declaration no. in SCIP database	4d93b011-3058-4b3d-8dd8-377ae784feb6
----------------------------------	--------------------------------------

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899629141	Smart Charge Pro 60A	Shipping carton box 1	383 mm x 327 mm x 587 mm	73.52 dm ³	21744.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 User instruction BATTERYcharge PRO

Legal advice

Application advice:

For more detailed application information and graphics please see product datasheet and user instruction.*for precise conditions please refer to:

www.osram.com/am-guarantee

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM